

# Concrete

## Grout Cone Stand

BC 411


ASTM C 939

Cast-aluminium flow cone is used in the laboratory and field for determining flow of grout mixtures by measuring the time of efflux of a specified volume of grout from a standardized flow cone. Includes adjustable point gauge assembly. Overall dimensions: 8" dia. x 12"H (203x305mm).



Grout Cone Stand

# Concrete

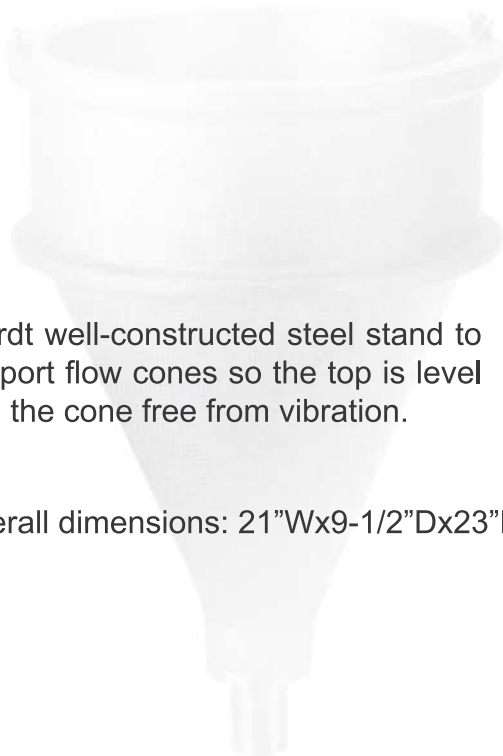

Sturdy well-constructed steel stand to support flow cones so the top is level and the cone free from vibration.

Overall dimensions: 21"Wx9-1/2"Dx23"H.



Flow Cone Stand